

SINGLE SCISSORS

BETTER MANUAL HANDLING

TECHNICAL SPECIFICATIONS

NOTE: EVERYTHING CAN BE CUSTOMIZED FOR YOUR NEEDS

- > LIFT CAPACITY: FROM 500 - 10.000 KG
- > TRAVEL: 550 - 3000 MM.
- > CLOSED HEIGHT: 160 - 800 MM.
- > LENGTH: 900 - 5000 MM.
- > WIDTH: 650 - 3000 MM.
- > POWER SUPPLY: 3X400 V/50 Hz+PE
- > CE MARKED
- > AVAILABLE IN RAL COLOURS, STAINLESS OR GALVANIZED STEEL, HYGIENIC DESIGN AND ATEX
- > RUNS 10 LIFTS PER HOUR 8 HOURS A DAY (FULL TRAVEL)
- PLEASE INQUIRE FOR INTENSIVE USE
- > 2 SAFETY LOCKS FOR MAINTENANCE
- > SAFETY TRIP BAR IN ALUMINIUM
- > 2 COMPONENT POLYURETHANE PAINT (RAL)



A TRANSLYFT lifting table improves both efficiency and productivity while relieving your employees from everyday stresses caused by bending and lifting. A lifting table can provide a solution whenever heavy lifting, awkward working positions and height variations is a challenge.

The TRANSLYFT standard program of lifting tables contains more than 100 different types and can each be adapted to exactly suit your workflow needs.

See our standard single scissor models on the following page.


More information at www.translyft.com/ei



This lifting table offers a flexible solution as it is on castors.



The lifting tables can be equipped with many different options such as tilt.

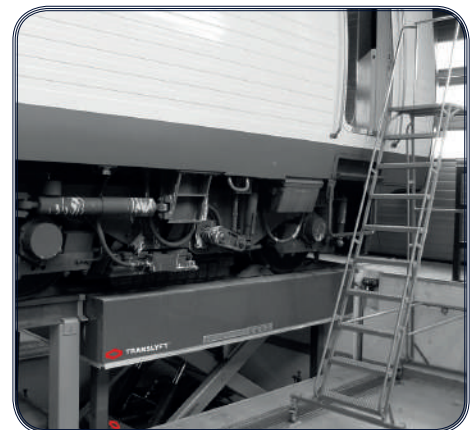

All lifts are delivered in a wear resistant RAL paint finish but can be produced in a stainless steel or galvanized steel solution.

| Type/Capacity kg | Travel mm | Closed height mm | Total raised height mm | Length mm | Width mm | Lift time sec | Motor kW | Weight kg |
|------------------|-----------|------------------|------------------------|-----------|----------|---------------|----------|-----------|
| TR 500 | 550 | 160 | 710 | 900 | 650 | 11 | 0,37 | 115 |
| TR 1000 A | 550 | 160 | 710 | 900 | 650 | 22 | 0,37 | 125 |
| TR 1000 | 550 | 160 | 710 | 900 | 900 | 22 | 0,37 | 135 |
| TR 2000 ^ | 530 | 200 | 730 | 900 | 900 | 13 | 0,75 | 190 |
| TL 1000 | 830 | 180 | 1010 | 1300 | 650 | 18 | 0,75 | 160 |
| TL 1000 B | 830 | 180 | 1010 | 1300 | 800 | 18 | 0,75 | 175 |
| TL 1000 F | 830 | 180 | 1010 | 1300 | 1000 | 18 | 0,75 | 180 |
| TL 2000 | 820 | 210 | 1030 | 1300 | 800 | 27 | 0,75 | 240 |
| TL 2000 F | 820 | 210 | 1030 | 1300 | 1000 | 27 | 0,75 | 250 |
| TL 3000 | 800 | 240 | 1040 | 1300 | 1000 | 18 | 2,2 | 330 |
| TL 3000 A | 800 | 240 | 1040 | 1300 | 800 | 18 | 2,2 | 320 |
| TL 4000 | 700 | 300 | 1000 | 1300 | 1000 | 18 | 2,2 | 460 |
| TB 1000 | 1000 | 210 | 1210 | 1500 | 800 | 18 | 0,75 | 240 |
| TB 1000 F | 1000 | 210 | 1210 | 1500 | 1000 | 18 | 0,75 | 265 |
| TB 2000 | 1000 | 210 | 1210 | 1500 | 800 | 20 | 2,2 | 280 |
| TB 2000 F | 1000 | 210 | 1210 | 1500 | 1000 | 20 | 2,2 | 295 |
| TB 4000 | 800 | 350 | 1150 | 1500 | 1200 | 27 | 2,2 | 625 |
| TB 6000 | 800 | 350 | 1150 | 1500 | 1200 | 36 | 2,2 | 700 |
| TM 1500 | 1100 | 230 | 1330 | 1700 | 900 | 27 | 0,75 | 315 |
| TM 1500 B | 1100 | 230 | 1330 | 1700 | 1200 | 27 | 0,75 | 365 |
| TM 3000 | 1100 | 250 | 1350 | 1700 | 900 | 29 | 2,2 | 430 |
| TM 3000 B | 1100 | 250 | 1350 | 1700 | 1200 | 29 | 2,2 | 455 |
| TM 5000 | 1100 | 350 | 1450 | 1700 | 900 | 42 | 2,2 | 600 |
| TM 5000 B | 1100 | 350 | 1450 | 1700 | 1200 | 42 | 2,2 | 630 |
| TA 1000 A | 1400 | 250 | 1650 | 2000 | 900 | 32 | 0,75 | 440 |
| TA 1000 | 1400 | 250 | 1650 | 2000 | 1200 | 32 | 0,75 | 505 |
| TA 2000 A | 1400 | 250 | 2000 | 900 | 900 | 35 | 2,2 | 465 |
| TA 2000 | 1400 | 250 | 1650 | 2000 | 1200 | 35 | 2,2 | 575 |
| TA 2000 B | 1400 | 250 | 1650 | 2000 | 1500 | 35 | 2,2 | 595 |
| TA 2000 R | 1400 | 260 | 1660 | 2000 | 2000 | 35 | 2,2 | 725 |
| TA 4000 B | 1300 | 300 | 1600 | 2000 | 1500 | 54 | 3 | 835 |
| TA 4000 R | 1300 | 300 | 1600 | 2000 | 2000 | 54 | 3 | 960 |
| TS 2000 | 1500 | 250 | 1750 | 2200 | 1200 | 35 | 2,2 | 580 |
| TS 2000 B | 1500 | 250 | 1750 | 2200 | 1500 | 35 | 2,2 | 650 |
| TS 4000 | 1500 | 350 | 1850 | 2200 | 1200 | 54 | 3 | 805 |
| TS 4000 B | 1500 | 350 | 1850 | 2200 | 1500 | 54 | 3 | 880 |
| TT 1500 | 1650 | 300 | 1950 | 2500 | 800 | 35 | 1,1 | 380 |
| TT 1500 B | 1650 | 300 | 1950 | 2500 | 1200 | 35 | 1,1 | 450 |
| TT 3000 | 1600 | 350 | 1950 | 2500 | 1000 | 35 | 2,2 | 710 |
| TT 3000 B | 1600 | 350 | 1950 | 2500 | 1500 | 35 | 2,2 | 870 |
| TT 3000 R | 1600 | 350 | 1950 | 2500 | 2000 | 35 | 2,2 | 950 |
| TT 3000 STR | 1600 | 320 | 1920 | 2500 | 2000 | 46 | 3 | 1200 |
| TT 6000 | 1500 | 450 | 1950 | 2500 | 1300 | 55 | 4 | 1160 |
| TT 12000 | 1250 | 410 | 1660 | 2600 | 2000 | 70 | 4 | 3320 |
| TX 8000 | 1600 | 600 | 2200 | 3000 | 1500 | 60 | 5,5 | 2200 |
| TX 8000 R | 1600 | 600 | 2200 | 3000 | 2000 | 60 | 5,5 | 2360 |
| TX 12000 | 1600 | 800 | 2400 | 40000 | 2500 | 75 | 5,5 | 3600 |
| TP 3000 | 2000 | 400 | 2400 | 3100 | 1500 | 55 | 3 | 940 |
| TP 6000 | 2000 | 500 | 2500 | 3100 | 1500 | 75 | 4 | 1600 |
| TP 6000 R | 2000 | 500 | 2500 | 3100 | 2000 | 75 | 4 | 1750 |
| TJ 6000 | 3000 | 550 | 3550 | 5000 | 3000 | 72 | 5,5 | 3200 |
| TJ 10000 | 3000 | 800 | 3800 | 5000 | 3000 | 80 | 11 | 5000 |

^ separate power unit

Contact TRANSLYFT Ireland at 01 893 4994 or infoireland@translyft.com