

STAINLESS STEEL

THE STRONG AND CLEAN SOLUTION

TECHNICAL SPECIFICATIONS

NOTE: EVERYTHING CAN BE CUSTOMIZED FOR YOUR NEEDS

- > AVAILABLE IN AISI 304 AND 316
- > LIFT CAPACITY: FROM 500 - 10.000 KG
- > TRAVEL: 550 - 3000 MM.
- > CLOSED HEIGHT: 160 - 800 MM.
- > LENGTH: 900 - 5000 MM.
- > WIDTH: 650 - 3000 MM.
- > POWER SUPPLY: 3x400 V/50 Hz+PE
- > CE MARKED
- > AVAILABLE IN STAINLESS STEEL, HYGIENIC DESIGN AND ATEX OR A MIX OF E.G. GALVANIZED AND STAINLESS STEEL.
- > RUNS 10 LIFTS PER HOUR 8 HOURS A DAY (FULL TRAVEL)
- PLEASE INQUIRE FOR INTENSIVE USE
- > 2 SAFETY LOCKS FOR MAINTENANCE
- > VERSION 2 CYLINDER IS STANDARD BUT CAN BE UPGRADED TO VERSION 3 (STAINLESS STEEL)
- > SAFETY TRIP BAR IN ALUMINIUM IS STANDARD BUT CAN BE UPGRADED TO STAINLESS STEEL



All the TRANSLYFT lifting tables can be provided in a stainless steel solution which makes them durable, corrosion-free and easy to clean. They can withstand intensive cleaning and are therefore particularly suitable for environments where hygiene is essential.

An ergonomic lifting solution always improves both efficiency and productivity while relieving your employees from everyday stresses caused by bending and lifting. A lifting table can provide a solution whenever heavy lifting, awkward working positions and height variations is a challenge.

Let us find a solution that suit your work flow needs. More information at www.translyft.com



The tables are corrosion proof and resistant to the rugged conditions and use of aggressive cleaning products in e.g. the food industry.



Lifting tables in mixed materials can be made e.g. galvanized scissor and bottom frame and stainless steel platform.



The lifting tables can be constructed for intensive use e.g. in a production line that runs 24-7. The steering can also be made automatic.


**TRANSLYFT®**

Type/Capacity kg	Travel mm	Closed height mm	Total raised height mm	Length mm	Width mm	Lift time sec	Motor kW	Weight kg
Single scissor								
TR 500 *	550	160	710	900	650	8	0,75	115
TL 1000	830	180	1010	1300	650	19	0,75	160
TL 1000 B	830	180	1010	1300	800	19	0,75	175
TL 1000 F	830	180	1010	1300	1000	19	0,75	180
TL 2000 □	820	230	1050	1300	800	25	1,1	240
TL 2000 F □	820	230	1050	1300	1000	25	1,1	250
TM 1500	1100	230	1330	1700	900	25	1,1	315
TM 1500 B	1100	230	1330	1700	1200	25	1,1	365
TS 2000	1500	250	1750	2200	1200	39	2,2	580
TS 2000 B	1500	250	1750	2200	1500	39	2,2	650
Double scissor								
TRD 500 *	1100	270	1370	900	650	17	0,75	140
TLD 1000	1600	375	1975	1300	800	29	1,1	310
TLD 1000 F	1600	375	1975	1300	1000	29	1,1	340
TLD 2000	1600	400	2000	1300	900	29	2,2	375
TMD 1000	2150	400	2550	1700	900	51	2,2	500
TMD 2000	2150	400	2550	1700	900	40	3	605
Low profile, excl. ramp								
TCB 1000	715	85	800	1500	800	13	0,75	260
TCB 1000 F	715	85	800	1500	1000	13	0,75	275
TCB 1500	715	85	800	1500	800	20	0,75	300
TCB 1500 F	715	85	800	1500	1000	20	0,75	345
TCB 2000	695	105	800	1500	800	20	1,1	340
TCB 2000 F	695	105	800	1500	1000	20	1,1	360
Low profile , U-shape								
TUB 1000	715	85	800	1450	1085	13	0,75	235
TUB 2000	695	105	800	1500	1200	20	1,1	325

Separate power unit is standard on the low profile tables.

* There is no cover over the power unit, as there is no room for it.

□ The closed height is higher compared to the painted models.

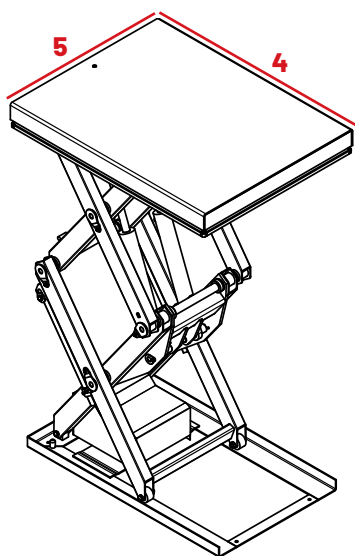

Capacity

Travel (1)

Closed height (2)

Total raised height (3)

Length (4)

Width (5)

Lift time

Motor

Weight

Highest load capability

(when loaded correctly)

Travel from closed height to

top position

Height at lowest position

Height at top position


Platform length

Platform width

Time in sec. to top position

Size of motor

Weight of table

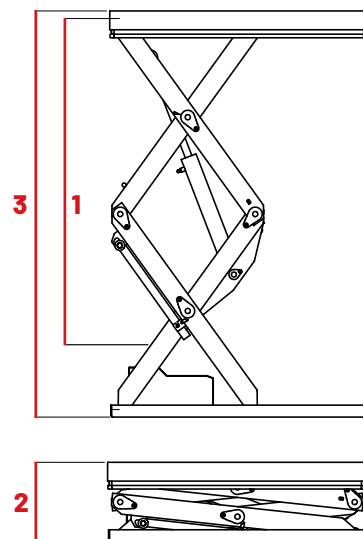**TRANSLYFT®**

Aalborgvej 321, 9352 Dybvad, Denmark
+45 9886 4900, sales@translyft.com