

SINGLE SCISSORS

BETTER MANUAL HANDLING

TECHNICAL SPECIFICATIONS

NOTE: EVERYTHING CAN BE CUSTOMIZED FOR YOUR NEEDS

- > LIFT CAPACITY: FROM 500 - 10.000 KG
- > TRAVEL: 550 - 3000 MM.
- > CLOSED HEIGHT: 160 - 800 MM.
- > LENGTH: 900 - 5000 MM.
- > WIDTH: 650 - 3000 MM.
- > POWER SUPPLY: 3X400 V/50 Hz+PE
- > CE MARKED
- > AVAILABLE IN RAL COLOURS, STAINLESS OR GALVANIZED STEEL, HYGIENIC DESIGN AND ATEX
- > RUNS 10 LIFTS PER HOUR 8 HOURS A DAY (FULL TRAVEL)
- PLEASE INQUIRE FOR INTENSIVE USE
- > 2 SAFETY LOCKS FOR MAINTENANCE
- > SAFETY TRIP BAR IN ALUMINIUM
- > 2 COMPONENT POLYURETHANE PAINT (RAL)



A TRANSLYFT lifting table improves both efficiency and productivity while relieving your employees from everyday stresses caused by bending and lifting. A lifting table can provide a solution whenever heavy lifting, awkward working positions and height variations is a challenge.

The TRANSLYFT standard program of lifting tables contains more than 100 different types and can each be adapted to exactly suit your work flow needs.

See our standard single scissor models on the following page.


More information at www.translyft.co.uk



This lifting table offers a flexible solution as it is on castors.



The lifting tables can be equipped with many different options such as tilt.

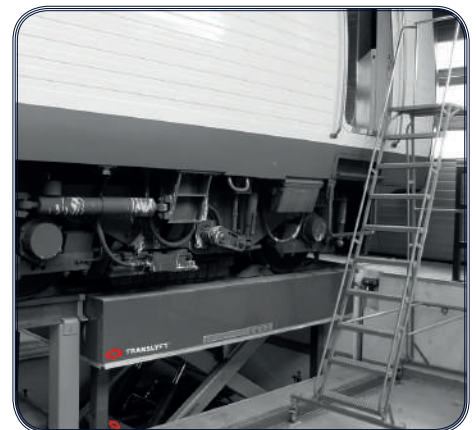

All lifts are delivered in a wear resistant RAL paint finish but can be produced in a stainless steel or galvanized steel solution.

Type/Capacity kg	Travel mm	Closed height mm	Total raised height mm	Length mm	Width mm	Lift time sec	Motor kW	Weight kg
TR 500	550	160	710	900	650	11	0,37	115
TR 1000 A	550	160	710	900	650	22	0,37	125
TR 1000	550	160	710	900	900	22	0,37	135
TR 2000 ^	530	200	730	900	900	13	0,75	190
TL 1000	830	180	1010	1300	650	18	0,75	160
TL 1000 B	830	180	1010	1300	800	18	0,75	175
TL 1000 F	830	180	1010	1300	1000	18	0,75	180
TL 2000	820	210	1030	1300	800	27	0,75	240
TL 2000 F	820	210	1030	1300	1000	27	0,75	250
TL 3000	800	240	1040	1300	1000	18	2,2	330
TL 3000 A	800	240	1040	1300	800	18	2,2	320
TL 4000	700	300	1000	1300	1000	18	2,2	460
TB 1000	1000	210	1210	1500	800	18	0,75	240
TB 1000 F	1000	210	1210	1500	1000	18	0,75	265
TB 2000	1000	210	1210	1500	800	20	2,2	280
TB 2000 F	1000	210	1210	1500	1000	20	2,2	295
TB 4000	800	350	1150	1500	1200	27	2,2	625
TB 6000	800	350	1150	1500	1200	36	2,2	700
TM 1500	1100	230	1330	1700	900	27	0,75	315
TM 1500 B	1100	230	1330	1700	1200	27	0,75	365
TM 3000	1100	250	1350	1700	900	29	2,2	430
TM 3000 B	1100	250	1350	1700	1200	29	2,2	455
TM 5000	1100	350	1450	1700	900	42	2,2	600
TM 5000 B	1100	350	1450	1700	1200	42	2,2	630
TA 1000 A	1400	250	1650	2000	900	32	0,75	440
TA 1000	1400	250	1650	2000	1200	32	0,75	505
TA 2000 A	1400	250	2000	900	900	35	2,2	465
TA 2000	1400	250	1650	2000	1200	35	2,2	575
TA 2000 B	1400	250	1650	2000	1500	35	2,2	595
TA 2000 R	1400	260	1660	2000	2000	35	2,2	725
TA 4000 B	1300	300	1600	2000	1500	54	3	835
TA 4000 R	1300	300	1600	2000	2000	54	3	960
TS 2000	1500	250	1750	2200	1200	35	2,2	580
TS 2000 B	1500	250	1750	2200	1500	35	2,2	650
TS 4000	1500	350	1850	2200	1200	54	3	805
TS 4000 B	1500	350	1850	2200	1500	54	3	880
TT 1500	1650	300	1950	2500	800	35	1,1	380
TT 1500 B	1650	300	1950	2500	1200	35	1,1	450
TT 3000	1600	350	1950	2500	1000	35	2,2	710
TT 3000 B	1600	350	1950	2500	1500	35	2,2	870
TT 3000 R	1600	350	1950	2500	2000	35	2,2	950
TT 3000 STR	1600	320	1920	2500	2000	46	3	1200
TT 6000	1500	450	1950	2500	1300	55	4	1160
TT 12000	1250	410	1660	2600	2000	70	4	3320
TX 8000	1600	600	2200	3000	1500	60	5,5	2200
TX 8000 R	1600	600	2200	3000	2000	60	5,5	2360
TX 12000	1600	800	2400	40000	2500	75	5,5	3600
TP 3000	2000	400	2400	3100	1500	55	3	940
TP 6000	2000	500	2500	3100	1500	75	4	1600
TP 6000 R	2000	500	2500	3100	2000	75	4	1750
TJ 6000	3000	550	3550	5000	3000	72	5,5	3200
TJ 10000	3000	800	3800	5000	3000	80	11	5000

^ separate power unit

Contact TRANSLYFT UK at 0870 904 7775 or enquiries@liftingtechnology.co.uk